


Marking: equip CAT.5E U/UTP 4PR 26AWG PATCH CABLE ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2 3P VERIFIED

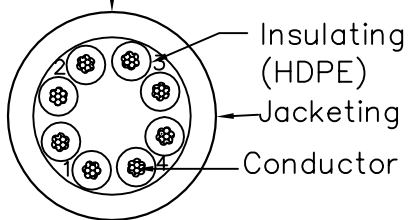

Conductor	Bare Copper 26AWG 7.0.152±0.005mm
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.20mm Diameter:0.80±0.06mm
Jacketing PVC	Thickness:MIN at any point:0.70mm MAX AVG:0.80mm Diameter:5.3±0.2mm

Wire	CAT. 5E UTP STR 26AWG*4P
Plug	YU-01

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

color / length index					
length	color	Item no.	length	color	Item no.
0,50 m	color x	8054x7	15 m	beige	805418
1,00 m	color x	8054x0	20 m	beige	805419
2,00 m	color x	8054x1	25 m	beige	805825
3,00 m	color x	8054x2	30 m	beige	805830
5,00 m	color x	8054x4	40 m	beige	805840
10 m	color x	8054x6	50 m	beige	805850

Unless specified on the drawing, tolerances are per the follows:
 .x ± 1
 .xx ± 0.2
 .xx ± 0.05



Patchkabel U/UTP Cat.5e